


BL/AV

Cilindrični odbijač vibracij iz pocinkanega jekla z moškim navojem
Bumper

ARTIKEL Item	A	B	M	E	Največja kompresijska obremenitev (Max Compression Load) daN
BL/AV 25x22 M6	25	22	06	20	20
BL/AV 25x22 M10	25	22	10	20	20
BL/AV 25x25 M6	25	25	06	18	18
BL/AV 25x30 M6	25	30	06	18	18
BL/AV 30x36 M6	30	36	06	23	25
BL/AV 40x30 M8	40	30	08	23	29
BL/AV 40x60 M8	40	60	08	23	28
BL/AV 50x50 M10	50	50	10	28	54
BL/AV 50x65 M8	50	64	08	35	50
BL/AV 60x60 M12	60	60	12	33	72
BL/AV 75x70 M12	75	70	12	37	117
BL/AV 100x85 M16	100	85	16	42	330

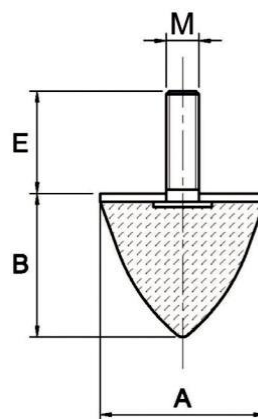

Tehnični podatki

Material: NR/SBR

Trdota: 60 ShA

Toleranca trdote: +/- 5 Sh

Kovinski del: Pocinkan vijak in podložka

Stanardni navoj: Pritrjen vijak na podložko

Product specification

Main part material: NR/SBR

Hardness: 60 ShA

Hardness tolerance: +/- Sh

Metallic part: Zinc plated screw and washer

Standard thread: Screw pressed on the washer