


BL/C

Cilindrični dušilec vibracij iz poncinkanega jekla z ženskim navojem

Zinc plated Double Female Cylindrical Mounting

ARTIKEL Item	A	B	M	F	Največja kompresijska obremenitev (Max Compression Load) daN	Strižna obremenit ev (Shear Load) daN
BL/C 15x15 M4	15	15	04	4	15	2
BL/C 20x15 M6	20	15	06	6	17	2
BL/C 20x20 M6	20	20	06	6	20	2
BL/C 20x25 M6	20	25	06	6	18	2
BL/C 20x30 M6	20	30	06	6	16	2
BL/C 25x15 M6	25	15	06	*	48	7
BL/C 25x20 M6	25	20	6	6	45	5
BL/C 25x25 M6	25	25	6	6	42	4
BL/C 25x30 M6	25	30	6	6	35	3
BL/C 30x20 M8	30	20	8	8	66	9
BL/C 30x30 M8	30	30	8	8	61	8
BL/C 30x40 M8	30	40	8	8	54	5
BL/C 40x30 M8	40	30	8	8	98	15
BL/C 40x35 M8	40	35	8	8	108	13
BL/C 40x40 M8	40	40	8	8	108	13
BL/C 40x30 M10	40	30	10	10	98	15
BL/C 40x40 M10	40	40	10	10	108	13
BL/C 50x30 M10	50	30	10	10	169	19
BL/C 50x40 M10	50	40	10	10	144	17
BL/C 50x50 M10	50	50	10	10	134	13
BL/C 60x10 M10	60	30	10	10	210	30
BL/C 60x50 M10	60	50	10	10	200	24
BL/C 60x30 M12	60	30	12	12	210	30
BL/C 60x40 M12	60	40	12	12	210	30
BL/C 75x30 M12	75	30	12	12	390	90
BL/C 75x40 M12	75	40	12	12	378	78
BL/C 75x50 M12	75	50	12	12	373	68
BL/C 100x50 M16	100	50	16	16	660	98
BL/C 100x55 M16	100	55	16	16	636	78
BL/C 100x60 M16	100	60	16	16	590	49

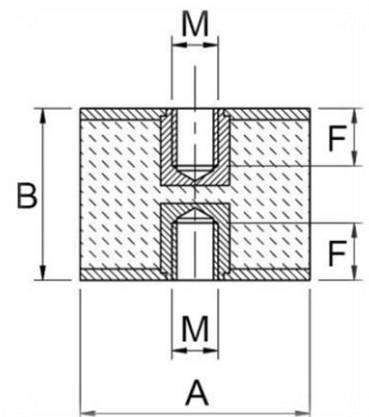

Tehnični podatki

Material: NR/SBR

Trdota: 60 ShA

Toleranca trdote: +/- 5 Sh

Kovinski del: Poncinkana podložka

Standardni navoj: Navojna slepa luknja

Product specification

Main part material: NR/SBR

Hardness: 60 ShA

Hardness tolerance: +/- 5 Sh

Metallic part: Zinc plated washer

Standard thread: Threaded blind hole