


## BL/E

### Cilindrični dušilec vibracij iz pocinkanega jekla z ženskim navojem

Zinc Plated Female Foot

ARTIKEL Item	A	B	M	F	Največja kompresijska obremenitev (Max Compression Load) <b>daN</b>
BL/E 20x15 M6	20	15	06	6	29
BL/E 20x20 M6	20	20	06	6	29
BL/E 25x15 M6	25	15	06	6	29
BL/E 25x18 M6	25	18	06	9	29
BL/E 25x20 M6	25	20	06	6	29
BL/E 30x20 M8	30	20	08	8	42
BL/E 30x30 M8	30	30	08	8	38
BL/E 40x30 M8	40	30	08	8	75
BL/E 40x40 M8	40	40	08	8	85
BL/E 50x20 M10	50	20	10	10	117
BL/E 50x30 M10	50	30	10	9	117
BL/E 50x40 M10	50	40	10	10	125
BL/E 50x50 M10	50	50	10	10	140
BL/E 60x30 M12	60	30	12	10	169
BL/E 75x25 M12	75	25	12	12	265
BL/E 75x50 M12	75	50	12	12	265

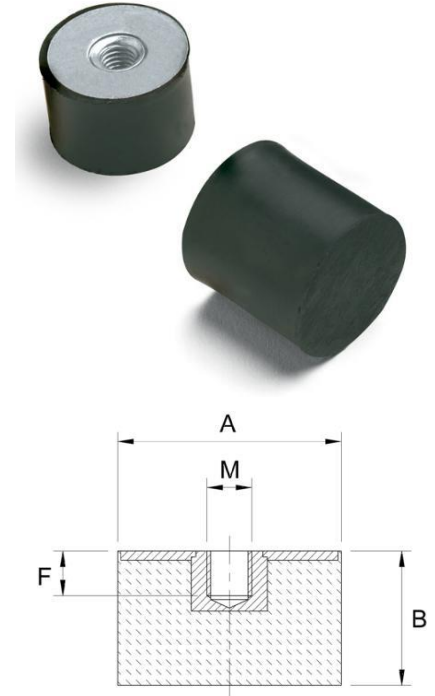

#### Tehnični podatki

Material: NR/SBR

Trdota: 60 ShA

Toleranca trdote: +/- 5 Sh

Kovinski del: Pocinkana podložka

Stanardni navoj: Navojna slepa luknja

#### Product specification

Main part material: NR/SBR

Hardness: 60 ShA

Hardness tolerance: +/- Sh

Metallic part: Zinc plated sandblasted washer

Standard thread: Threaded blind hole